


LAMP PHOTOMETRIC REPORT

MODEL: 99LWL03/WH		
POWER: 3W	VOLTAGE: 230V	WORKING VOLTAGE: 230V
MANUFACTURER: Elmark Industries JSC		

TOTAL FLUX: 223.53 lm

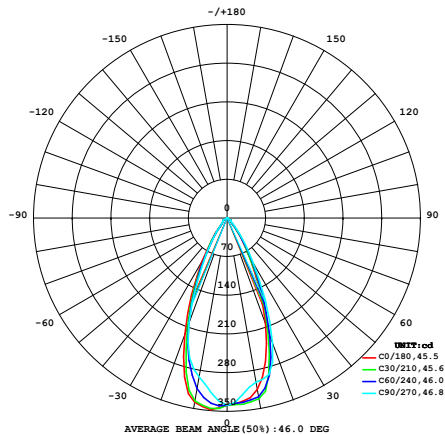

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%
10	315.4	333.7	301.8	298.4	338.4	326.8	292.5	289.9	0- 10	30.89	30.89	13.8
20	203.0	221.2	241.6	244.8	224.6	206.3	201.6	201.3	10- 20	76.34	107.2	48
30	82.18	89.69	94.94	94.85	91.75	79.60	76.96	78.53	20- 30	66.39	173.6	77.7
40	20.01	21.08	28.35	30.53	23.97	18.70	22.11	22.43	30- 40	31.05	204.7	91.6
50	9.635	9.330	9.219	9.319	9.458	9.686	9.777	9.781	40- 50	10.19	214.9	96.1
60	7.597	7.550	7.583	7.672	7.792	7.740	7.754	7.683	50- 60	7.748	222.6	99.6
70	0	0	0	0	0	0	0	0	60- 70	0.9220	223.5	100
80	0	0	0	0	0	0	0	0	70- 80	0	223.5	100
90	0	0	0	0	0	0	0	0	80- 90	0	223.5	100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: MEDIUM
Temperature:25.3°C
Operators:
Test Date:16 December 2022

γ Range: 0 - 60DEG
 γ Interval: 2.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:6.265m [K=1.0000]
Remarks:

```

γ Range: 0 - 60DEG
γ Interval: 2.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:6.265m [K=1.0000]
Remarks:

```

```

γ Range: 0 - 60DEG
γ Interval: 2.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:6.265m [K=1.0000]
Remarks:

```